


■ Features

- ✚ Nine 24VAC individually fused outputs
- ✚ Circuit Short protection
- ✚ High-temperature protection
- ✚ AC power LED indicator
- ✚ Individual LED's for each output
- ✚ Power ON/OFF switch
- ✚ Unit maintains camera synchronization
- ✚ Easy installation saves time and eliminates costly labor
- ✚ Spare fuses included
- ✚ 1 year warranty

■ Specification

Input Voltage	AC200-240V
Input Voltage Frequency	50/60Hz
Output Specification	
Output Voltage	24 VAC+10%
Total Output Current	5A(500mA/output,9 channels for 9 sets security cameras)
Total Outputs	145W
Fuse Type	Glass Fuse
Fuse Rating	0.5 Amps / 250VAC
Protection	
General Protection	each output has individual fuse and LED indicator, when problem occurs,only affect the individual output, other outputs still working
Circuit Short Protection	when short condition occurs, individual fuse will open the circuit,when condition removed, replacing another new fuse will back to close.
High-temperature protection	135°C Output shutdown
Over-voltage protection	No
General Specifications	
Working temperature and humidity	-10°C~+60°C, 20%~80%RH
Store temperature and humidity	-20°C~+85°C,10%~90%RH
Application	
CCTV	Camera, PTZ, IR Illuminators, Video Process Equipment, etc.

■ Shape and installation dimension

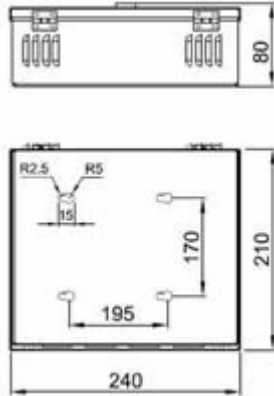


■ Manual

24V AC 9 OUTPUT POWER SUPPLY

MPS-145-B9

Connection Diagram:

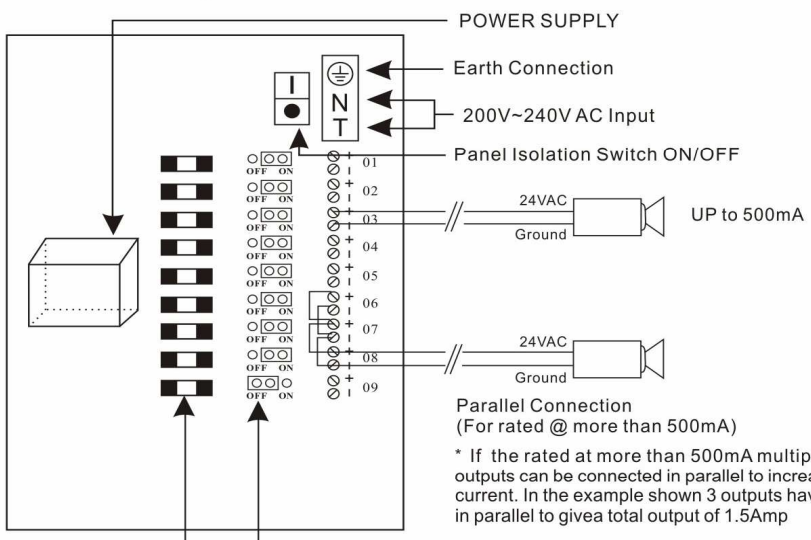

POWER SUPPLY

Earth Connection

200V~240V AC Input

Panel Isolation Switch ON/OFF

01

02

03

04

05

06

07

08

09

24VAC

Ground

UP to 500mA

24VAC

Ground

Parallel Connection
(For rated @ more than 500mA)

* If the rated at more than 500mA multiple outputs can be connected in parallel to increase the total output current. In the example shown 3 outputs have been connected in parallel to give a total output of 1.5Amp


To disable an output move the jumper link to the off position.

Mulview Technology

Protection Fuses
(Note: Fuses can be upgraded to 1 Amp if required providing total power output does not exceed 6A)

LED Fuse Status Indicator
LED ON = Fuse OK
LED OFF = Fuse Fault

Test & Measurement:

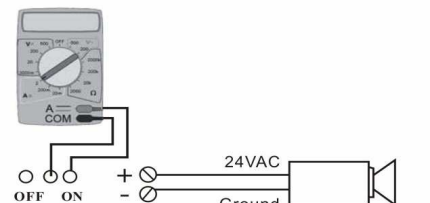

OFF ON

A

COM

24VAC

Ground

To determine the current(A), remove the jumper link, set your meter to ~A Amps AC, and with the Load connected measure the current across in ON and COMMON terminals.

Specifications:

Input Voltage: 200V~240V

Output Current: 9 X 500mA fused outlets (6A Max)

Output Power: 145W

Dimensions(mm):235(L) X 205(W) X 75 (H)

* For Indoor Use Only

Multiple View, More attention!