



PDS Design Solutions Limited

Unit 1, Shenval House, South Road, Harlow, Essex CM20 2BD
 Tel: 01279 431746 Fax: 01279 435073 Email: sales@whatpowersupply.com

700 WATT 230V OUTPUT BACKUP SYSTEMS.

CONTINUOUS POWER EVEN DURING HOURS OF MAINS FAILURE.

MODEL SOCKETS	BATTERY	SOCKETS	MODEL	BATTERY	
SM4380	48 Volts	2 X UK.	SM4386	72Volts	2 X UK.
SM4381	48 Volts	2 X SHUKO	SM4387	72 Volts	2 X SHUKO.
SM4383	60 Volts	2 X UK.	SM4388	84 Volts	2 X UK.
SM4384	60 Volts	2 X SHUKO	SM4389	84 Volts	2 X SHUKO.




- **AUTO CHANGE OVER WHEN POWER FAILS.**
- **RUNS MICROWAVES AND SMALL FRIDGES.**
- **HIGH OUTPUT POWER IN COMPACT SIZE.**
- **CONTROLLED SURGE HANDLING.**

GENERAL DESCRIPTION: These static inverters convert battery power into a 230V AC RMS 50 Hz supply suitable for operating domestic appliances, small power tools, etc. They are particularly suitable for small refrigerators and microwave ovens because of their high surge capability. They can be permanently connected to 230V AC mains and will automatically change over to battery operation when the mains fails. The nominal continuous power rating into a resistive load is 700 watts, with intermittent operation at 800 watts.

When the mains input socket is connected to functioning mains, it supplies the connected appliance. The battery function may be switched off by the switch on the front face, disabling automatic change-over.

BATTERY SELECTION: Only heavy-duty (high discharge rate) batteries are suitable as a power source. Fully sealed types should be used in enclosed spaces (especially inside the home). Ordinary car batteries are only suitable in well ventilated areas.

FIGURE 1 CONCEPT AND CONNECTION DIAGRAM.

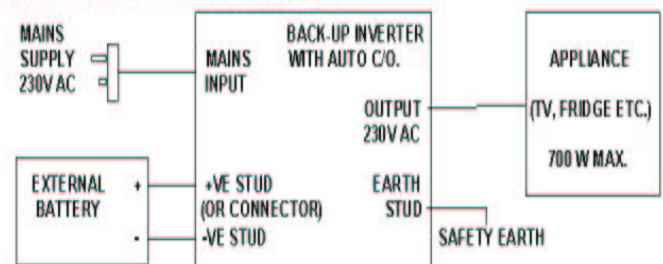

SPECIFICATION:

INPUT

Battery: 48V, 60V, 72V or 84V nominal.
 Voltage Range: Nominal, -11.7%, +16%.
 Power, No Load: 12W
 Efficiency: 85% typical.
 AC Input Voltage: 230V AC.

OUTPUT

Output Voltage: 230V ± 10% from inverter (or straight through mains).
 Frequency: 50Hz nominal, 48Hz to 53Hz.
 Output Wave Form: Quasi sine wave.
 Power, Nominal: 700 Watts continuous (resistive).
 Power, Short term: 800 Watts for 5 minutes.
 Protection: Current and temperature limit.

GENERAL

Size: 170mm x 270mm x 180mm.
 Weight: 7.4 Kg.
 Storage Temperature: -40 to +70C.
 Operating Temperature: -40 to +35C.
 Manufacturer: Made in the United Kingdom.

CAUTION: This adaptor is supplied on the basis of the user determining the suitability for the purpose for which it is to be used. Do not use in a moving vehicle without the consent of the vehicle manufacturer. Do not use for aviation or marine applications without our written agreement. Do not use for life dependent applications. We reserve the right to change the specification without notice.