

PDS DESIGN SOLUTIONS LTD

18 Channels output CCTV power supply

MPS-200-18D




Features

- Eighteen 12VDC individually fused outputs
- Circuit Short protection
- High-temperature protection
- AC power LED indicator
- LED's for each output
- Power ON/OFF switch
- Unit maintains camera synchronization
- Easy installation saves time and eliminates costly labor
- Spare fuses included
- 4 2 years warranty


Input Voltage	AC90-264V
Input Voltage Frequency	50/60Hz
Output Specification	
Output Voltage	12VDC+10%
Total Output Current	16.5 A(12CH \rightarrow 1A,6CH \rightarrow 0.5A,meet for different camera)
Total Outputs	201W
Fuse Type	Glass Fuse
Fuse Rating	1 Amps / 250VAC, 0.5 Amps / 250VAC
Protection	
General Protection	each output has individual fuse and LED indicator, when problem occurs, only affect the individual output, other outputs still working
Circuit Short Protection	when short condition occurs, individual fuse will open the circuit, when condition removed, replacing another new fuse will back to close.
Over-load proctection	105-135%hiccup mode,auto-recovery
Over-voltage protection	115-135%,Shut down o/p voltage, re-power on to recover
General Specifications	
Working temperature and humidity	-10℃~+60℃, 20%~80%RH
Store temperature and humidity	-20℃~+85℃,10%~90%RH
Application	
ССТV	Camera, PTZ, IR Illuminators, Video Process Equipment, etc.



Shape and installation dimension



Manual

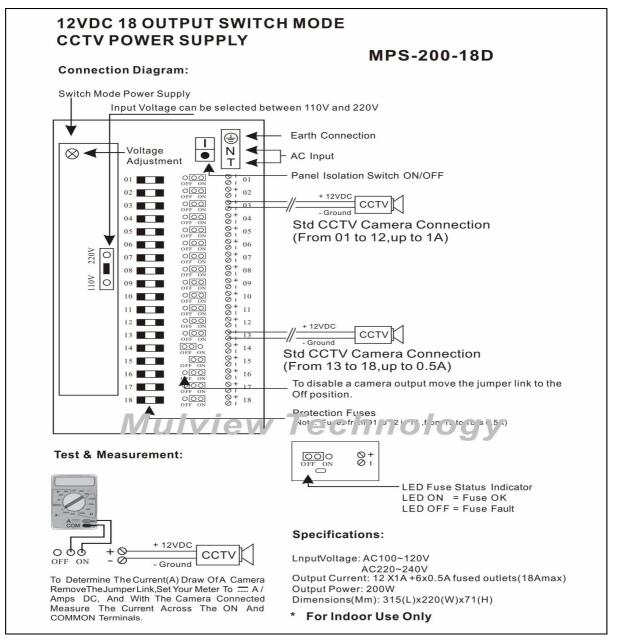

Multiple View, More attention!