



Type Approval by



PDSVL-SUA1000I 230V
PDSVL-SUA1500I 230V


IEC 60945 conform



Technical Data:

PDSVL-SUA1000I 230V PDSVL-SUA1500I 230V

| | | |
|--|---------------------------------|-----------------------|
| Nominal input voltage | 230V | |
| Input frequency | 50/60 Hz +/- 3Hz (auto sensing) | |
| Output power capacity | 1.000 VA 670 Watts | 1.500 VA 980 Watts |
| Typical backup time at half load | 20.6 min. (335 Watts) | 23.9 min. (490 Watts) |
| Typical backup time at full load | 6.1 min. (670 Watts) | 6.7 min. (980 Watts) |
| Net weight | 41.50 lbs (18.86 kg) | 53.00 lbs (24.09 kg) |
| Operating environment | 0-40 °C (32-104 °F) | |
| Operating elevation | 0-10000 feet (0-3000 m) | |
| Storage temperature | -15 - 45 °C (5-113 °F) | |
| Storage elevation | 0-50000 feet (0-15000 m) | |
| Audible noise at 1m from surface of unit | 41 dBA | 45 dBA |
| Online thermal dissipation | 100 BTU/hr | 135 BTU/hr |

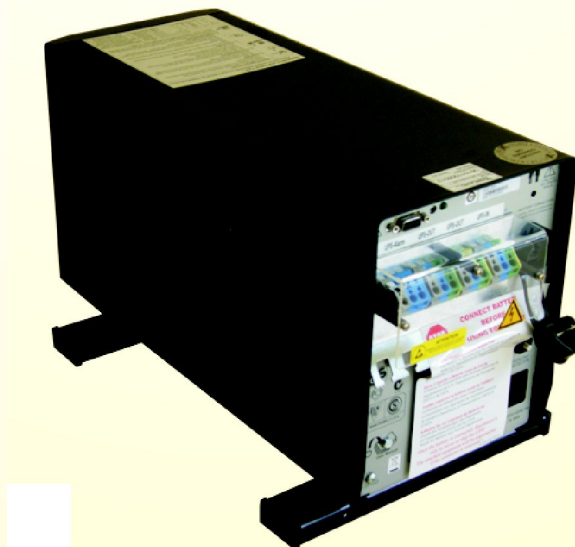

TEL: 44 (0) 1279 219175 Email: sales@whatpowersupply.com

www.whatpowersupply.com

Please contact us
for further information!