




## PDS Design Solutions Limited

### SYS 1174

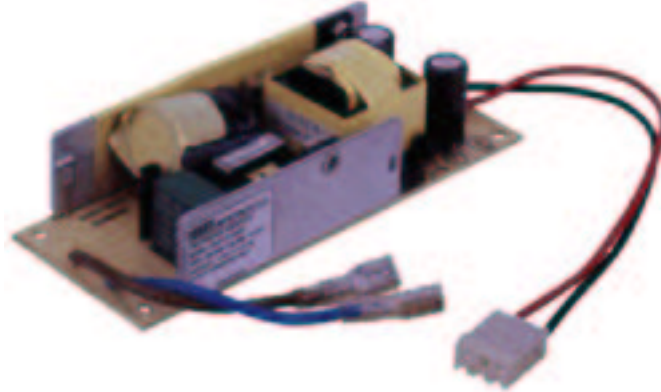

Input Voltage Type: Universal Range  
AC Input Voltage: 90~264 Vac  
AC Input Frequency: 47~63 Hz  
AC Input Current: 1A RMS  
No. of Outputs: Single Output  
Load Regulation: +/-5%  
Min. O/P Amper: 0 A  
Operation Temperature: 0~40°C  
Protection: Short, Over Voltage, Over Current  
MTBF: 35000 Hours  
Hold Up Time: 10 ms  
Safety: CE, cUL Approved (RoHS compliant)  
Weight: 125 grams  
Dimension: 116 mm (L), 45 mm (W), 30 mm (H)

Part Number	Power Rating	O/P Voltage Max.	O/P Current (A)
SYS 1174-1224	12	24	0.5
SYS 1174-2005	20	5	4
SYS 1174-2309	23	9	2.56
SYS 1174-2412	24	12	2
SYS 1174-2424	24	24	1
SYS 1174-2506	25	6	4.17
SYS 1174-2709	27	9	3
SYS 1174-3012	30	12	2.5
SYS 1174-3015	30	15	2
SYS 1174-3016	30	16	1.88
SYS 1174-3018	30	18	1.67
SYS 1174-3019	30	19	1.58
SYS 1174-3020	30	20	1.5
SYS 1174-3024	30	24	1.25