



Features :


- IP67 design for indoor or outdoor installations
- Protections: Short circuit / Overload/Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE, RoHS Certification
- 1 years warranty

IP67 CE RoHS

SPECIFICATION

MODEL		XH-V24200-A			
OUTPUT	DC VOLTAGE	24V			
	RATED CURRENT	8.3A			
	CURRENT RANGE	0~8.3A			
	RATED POWER	200W			
	RIPPLE & NOISE (max.) ^{NOTE2}	150mV			
	VOLTAGE TOLERANCE ^{NOTE3}	±2%			
	SETUP, RISE TIME	80ms/220VAC			
	HOLD UP TIME (Typ.)	60ms/220VAC			
INPUT	VOLTAGE RANGE	170 ~ 250VAC			
	FREQUENCY RANGE	50 ~ 60Hz			
	POWER FACTOR (Typ.)	PF>0.6/220VAC			
	EFFICIENCY (Typ.)	82%			
	AC CURRENT (Typ.)	1.85A/220VAC			
	INRUSH CURRENT (Typ.)	COLD START 50A/220VAC			
PROTECTION	Short circuit	Protection type : recovers automatically after fault condition is removed			
	Overload	overload protected @ 145-160% above peak rating			
	Over temperature	Protection type : Shut down o/p voltage, re-power on to recover			
ENVIRONMENT	WORKING TEMP.	-30 ~ +50°C (Refer to output load derating curve)			
	WORKING HUMIDITY	20 ~ 99% RH non-condensing(Waterproof)			
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 99% RH			
SAFETY & EMC	SAFETY STANDARDS	CE Mark (LVD) , IP67			
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-GND:1.5KVAC			
	EMC Test Standards	EN55015:2006 ; EN61547:1995+A1:2000 ; EN61000-3-2:2006 ; EN61000-3-3:1995+A2:2005 ; EN61347-1:2001 ; EN61347-2-13:2006			
NOTE	<p>1. All parameters NOT specially mentioned are measured at 220VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 10uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p>				


Mechanical Specification

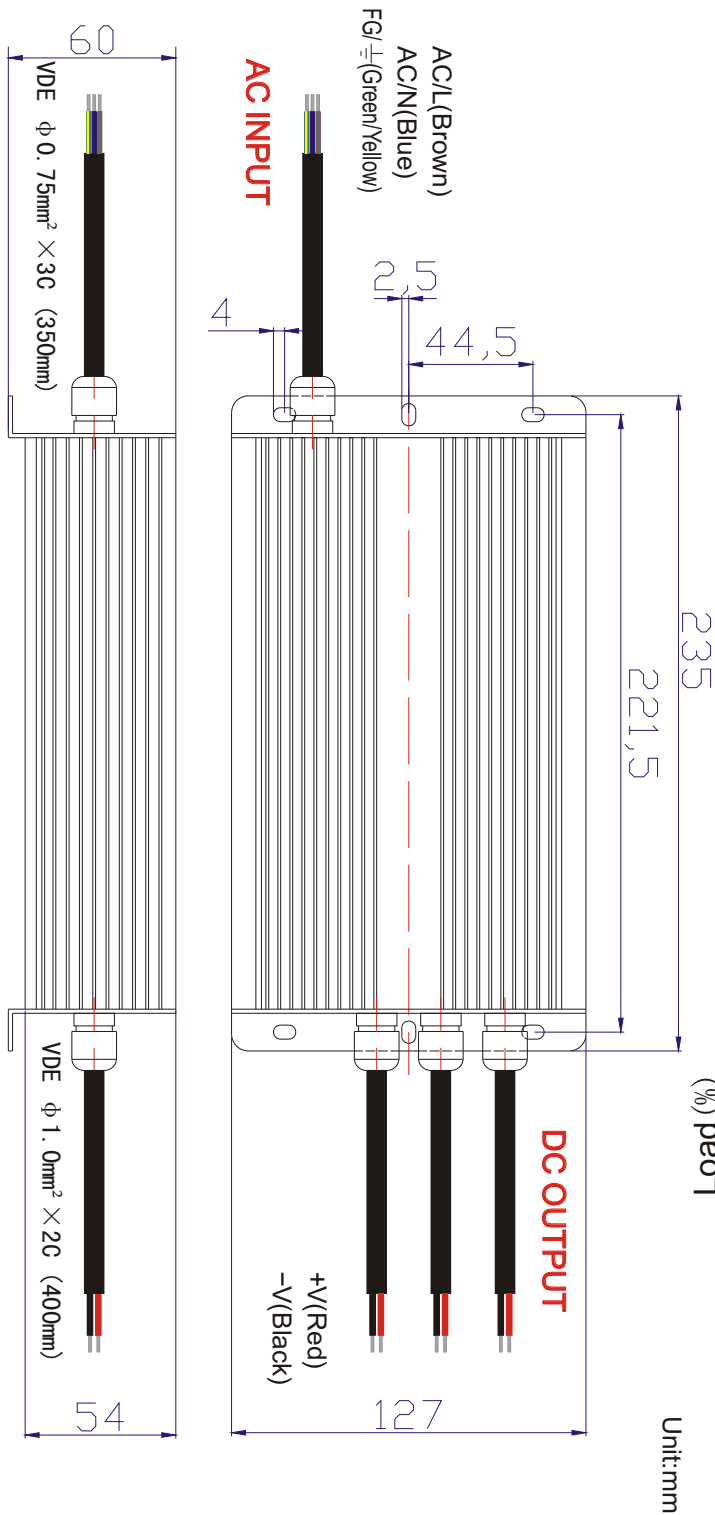

Others

DIMENSION	235×127×60(mm) (L×W×H)
CARTON QUANTITY	5PCS/Carton
CARTON SIZE	432×302×179(mm)
WEIGHT	2.7kg/PCS

Derating Curve

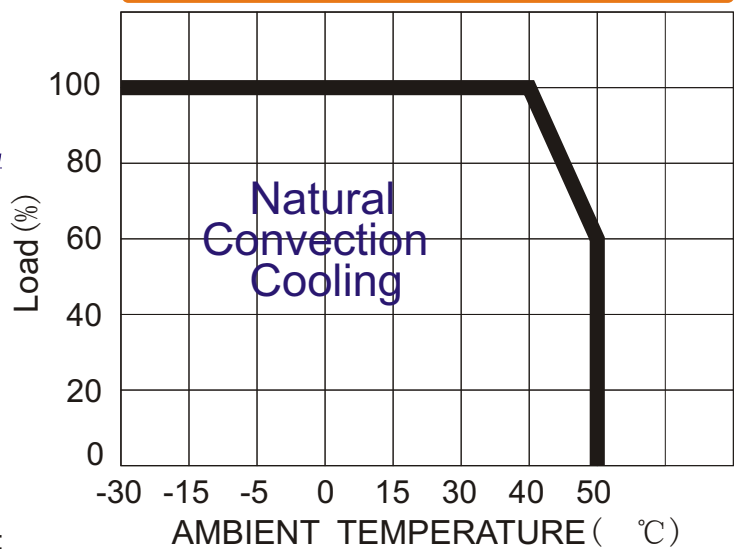

tel: 01279 219175, email: sales@whatpowersupply.com